

CUPROFRIO®


cuprofrío standard dimensions from stock* in straight lengths, temper hard as drawn

Dimension (mm)	Weight nominal (kg/m)	Operating pressure** (bar)	Straight lengths (m/cardboard box***)
6 x 1	0.140	224	200
8 x 1	0.197	162	100
10 x 1	0.253	126	75
12 x 1	0.309	104	50
14 x 1	0.365	88	50
15 x 1	0.393	82	50
16 x 1	0.421	76	50
18 x 1	0.477	66	50
22 x 1	0.590	53	50
28 x 1	0.758	42	50
28 x 1.5	1.116	63	25
35 x 1	0.955	33	25
35 x 1.5	1.411	50	25
42 x 1	1.152	28	25
42 x 1.5	1.706	42	25
54 x 1.5	2.212	32	20
54 x 2	2.921	43	20
64 x 2	3.483	36	5 m w/o cardboard
76.1 x 2	4.162	30	5 m w/o cardboard
88.9 x 2	4.881	26	5 m w/o cardboard
108 x 2.5	7.408	27	5 m w/o cardboard

* other dimensions are available on request

** calculated with 3.0 times safety coefficient on the basis of soft copper tubes with R_m 200 N/mm² at an operating temperature of 100 °C according to EN 14726

*** packing unit

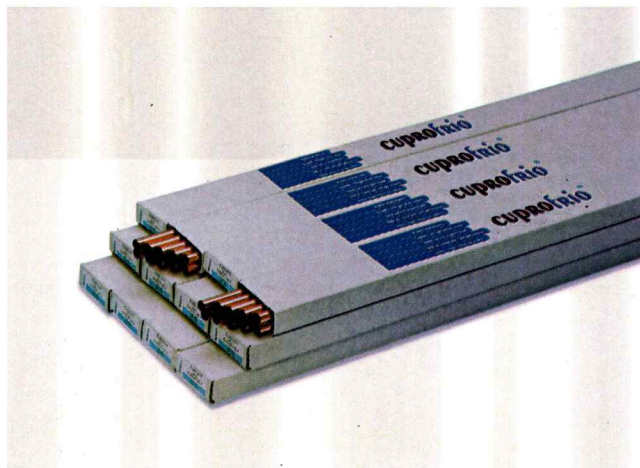

cuprofrío standard dimensions from stock* in straight lengths, temper half hard

Dimension (mm)	Weight nominal (kg/m)	Operating pressure** (bar)	Straight lengths (m/cardboard box***)
10 x 1	0.253	126	75
12 x 1	0.309	104	50
16 x 1	0.421	76	50
18 x 1	0.477	66	50
22 x 1	0.590	53	50
28 x 1	0.758	42	50

cuprofrío standard dimensions from stock* in straight lengths, temper soft, in wooden box

28 x 1.5	1.116	63	600
35 x 1.5	1.411	50	500
42 x 1.5	1.706	42	350
54 x 2	2.921	43	200

* other dimensions are available on request

** calculated with 3.0 times safety coefficient on the basis of soft copper tubes with R_m 200 N/mm² at an operating temperature of 100 °C according to EN 14726

*** packing unit