

INT[®]276 LN Level monitoring



INT276 LN

Illustration similar. Scope of delivery may deviate.

Application

The optical level monitoring INT276 LN is employed for contactless single-point measurement of liquid levels, e.g. for compressors, pumps, containers, etc. The solution consists of a screw-in and an evaluation part. The screw-in part is permanently installed at the measuring point for optical level recording. The electronic evaluation part can be mounted or replaced without having to open the circuit of the medium to be monitored.

Functional description

Light pulses of the device are refracted in fluids and reflected in gaseous environments. Thus the INT276 LN reliably recognizes the fluid level.

The reactions are time delayed, to prevent unnecessary switching in response to temporary fluctuations in the fluid.

If the level is too low or in case of a malfunction, the relay drops.

Once the correct level is reached again or the malfunction has been rectified, the relay energizes again.

The potential-free changeover contact can be looped directly into a safety chain without auxiliary relays.

An integrated self-monitoring ensures increased operational reliability; an installation check ensures the proper installation.

An installed LED (see blink code) signals the current status.

Blink code

	Level good
	Level missing
	Internal malfunction, voltage supply too low or faulty installation

Installation instruction


- Ensure cleanliness of thread and glass of the screw-in part.
- Mount the evaluation part into the screw-in part.
- The cable exit has to point downward.

Safety instructions


Installation, maintenance, and operation are to be carried out by an electrician. The applicable European and national standards for connecting electrical equipment must be observed.

Order data

INT276 LN Level monitoring	52 S 476 S66
Further product information	See www.kriwan.com

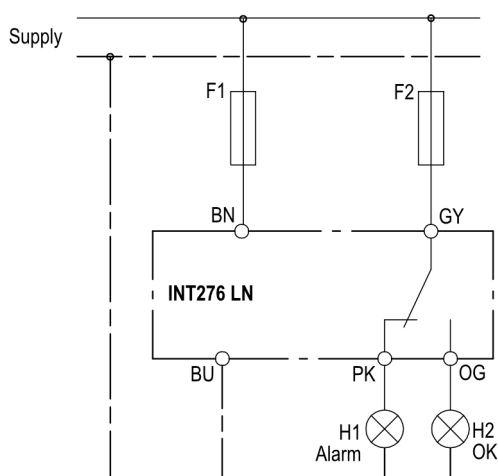

Anschluss-Schaltbild

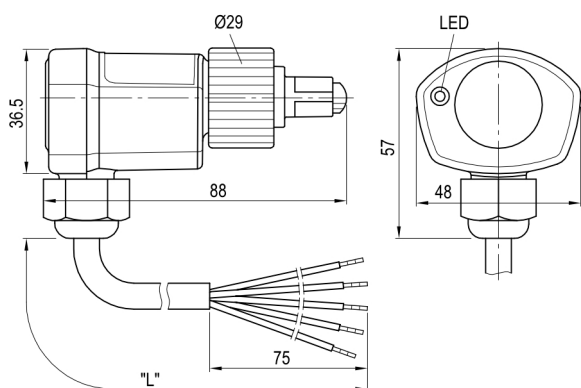

Maße in mm

Technical specifications

Supply voltage	AC 50/60 Hz 230 V $\pm 10\%$ 3 VA
Permissible ambient temperature	-30...+60 °C
Fluid temperature	Max. +120 °C (<16000 h) Max. +100 °C
Permissible relative humidity	10-95 % R H without condensation
Start delay	
– after supply voltage has been applied	3 s ± 1 s
– Level is missing or error	5 s ± 2 s
– Level good and no error	5s ± 2 s
Relay	
– Contact	AC 240 V 2.5 A C300 Min. AC/DC 24 V 20 mA
– Mechanical service life	approx. 1 million switching cycles
Protection class according to EN 60529	IP54 in installed status
	Cable 5 x AWG 18/7 L=2 m
Housing material	PA glass-fiber reinforced
Mounting	Coupling ring (torque max. 10 Nm)
Dimensions	See dimensions in mm
Weight	Approx. 260 g
Testing basis	EN 61000-6-2, EN 61000-6-3 EN 61010-1 Overvoltage category II Pollution level 2
Approval	UL file no. E222056 cUR _{us}

KRIWAN Industrie-Elektronik GmbH

Allmand 11

74670 Forchtenberg phone: (+49) 7947 822 0 info@kriwan.com

Deutschland fax: (+49) 7947 1288 www.kriwan.com

